



Temperature compensation for flooded lead acid in float charge mode
(30mv per degC per UL1776)

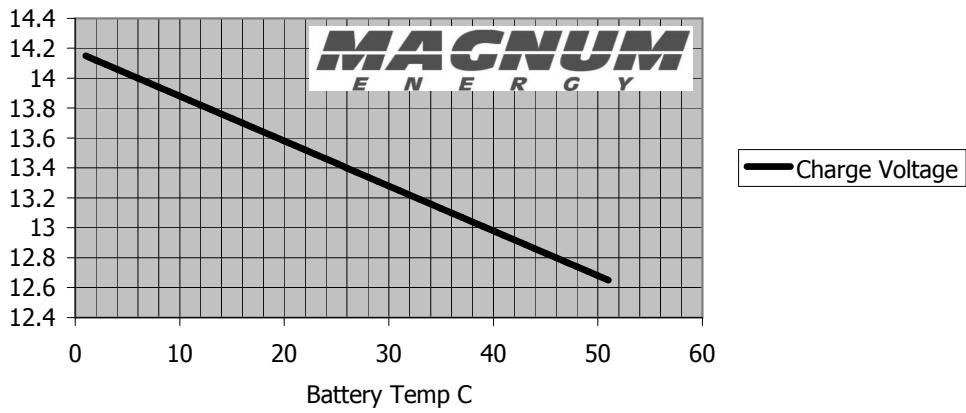

Temperature compensation for AGM in float charge mode (30mv per degC per UL1776)

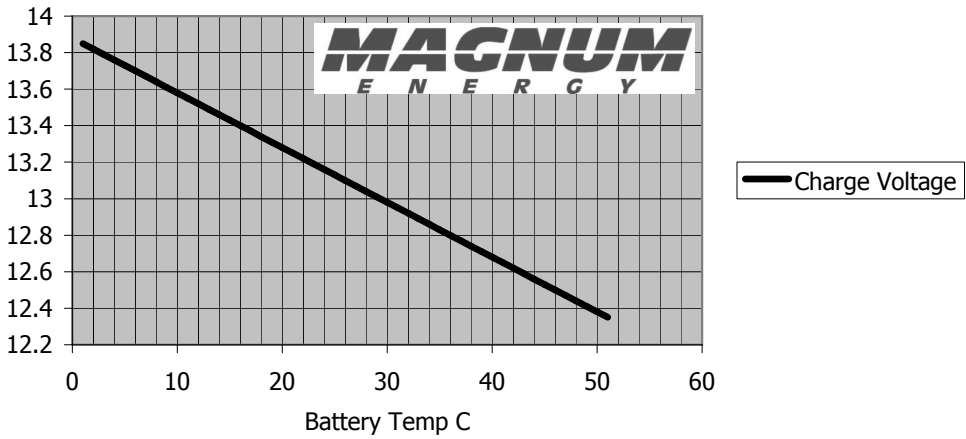

Temperature compensation for Gel in float charge mode (30mv per degC per UL1776)

